

Trench struts

TITAN terra trench strut
acc. to DIN 4124



TITAN terra trench strut for wood shoring *

Ordering code	Adjustment range approx. [cm]	Admissible load [kN]	Weight approx. [kg]
terra spindle	30	-	2,1
terra Gr. 1	50-80	38-30	3,6
terra Gr. 1a	60-90	36-29	4,0
terra Gr. 2	80-110	34-29	4,6
terra Gr. 3	110-140	29-23	5,5
terra Gr. 4	140-170	26-22	6,5


TITAN 48 trench strut
acc. to DIN 4124



TITAN 48 trench strut for wood shoring *

Ordering code	Adjustment range approx. [cm]	Admissible load [kN]	Weight approx. [kg]
Ti 48/120	70-117	63-48	8,0
Ti 48/150	90-150	61-45	10,0
Ti 48/210	120-210	60-38	13,0

TITAN 60 trench strut
acc. to DIN 4124

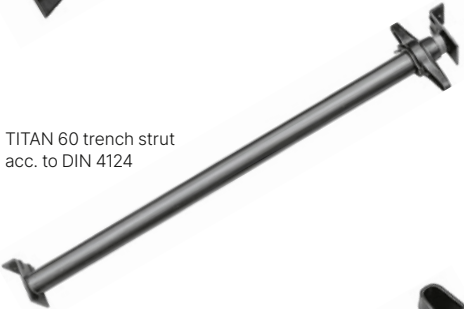

TITAN 60 trench strut for wood shoring *

Ordering code	Adjustment range approx. [cm]	Admissible load [kN]	Weight approx. [kg]
Ti 60 spindle	60	-	10,0
Ti 60/150	90-150	113-99	17,0
Ti 60/200	140-200	100-93	20,0
Ti 60/250	190-250	95-84	23,0
Ti 60/300	240-300	85-72	26,0

Gigant S with hook-type
angle for HEB 140-240



Gi-S trench strut for steel (HEB) waler

Type inspection number	Designation	Adjustment range approx. [cm]	Admissible load [kN]	Weight approx. [kg]
Gigant S TBG 3-Gi-S trench strut	Gi-S-120	70-120	210-177	26,0
	Gi-S-170	105-170	210-177	32,0
	Gi-S-210	140-210	184-156	36,0
	Gi-S-260	190-260	176-140	40,0
	Gi-S-310	240-310	157-138	45,0


Gi-SV trench strut with hook-type
angle for HEB 140-300



Gi-SV trench strut for steel (HEB) waler

Type inspection number	Designation	Adjustment range approx. [cm]	Admissible load [kN]	Weight approx. [kg]
Gigant SV TBG 3-Gi-SV trench strut	Gi-SV-210	140-210	548-290	69,0
	Gi-SV-260	190-260	471-260	81,0
	Gi-SV-310	240-310	424-260	92,0
	Gi-SV-380	310-380	310-380	107,0
	Gi-SV-450	380-450	380-450	122,0

Gi-SV-I spindle/non-adjustable
head with hook-type angle
for HEB up to 300

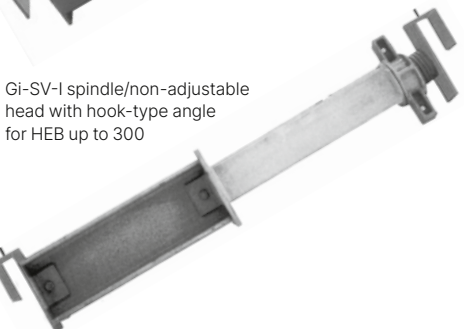

Gi-SV-I spindle/non-adjustable head for steel (HEB) waler

Type inspection number	Designation	Adjustment range approx. [cm]	Admissible load [kN]	Weight approx. [kg]
TBG 3-Gi-SV-I spindle/non-adjustable head	Gi-SV-I	72-97	448-393	50,0
	Gi-SV-I/F	-	448-393	5,0

* for sale only